

Kubota



KUBOTA DIESEL ZERO-TURN MOWER

ZD

ZD326

Kubota's ZD-326 zero-turn mower delivers the performance and high quality demanded by commercial operators.





Cutting grass is the commercial operator's livelihood. And Kubota's ZD326 delivers the power, durability, and performance professionals want.



Day in and day out, you need a professional turf mower that handles non-stop use—a mower that's manoeuvrable, cost effective, and loaded with the features to make your job easier. That's why Kubota developed the ZD326 zero-turn commercial mower—to deliver the results your business demands. The ZD326 offers a state-of-the-art Kubota diesel engine, a high-capacity HST transmission, a deep mower deck, and an ultra-comfortable operating area. In short, the ZD326 delivers.

COMFORT

The ZD326 boasts a wide array of features designed to make work easier. Wider control levers and a full-flat operator platform allow greater legroom; the angled panel helps to prevent glare for easier indicator and control viewing. In addition, the ZD326 offers an ergonomic, 4-control adjustable seat to prevent fatigue and a conveniently placed cup holder so you can quench your thirst on the job.

HIGH-BACK DELUXE SUSPENSION SEAT

Outstanding comfort is what you'll feel with Kubota's standard deluxe link-type suspension seat with adjustable armrests. The extra-wide seat features weight adjustment, adjustable armrests, and much more to give the operator a custom fit.




LUMBAR SUPPORT



SUSPENSION SEAT
ADJUSTMENT
LEVER



RECLINING DIAL

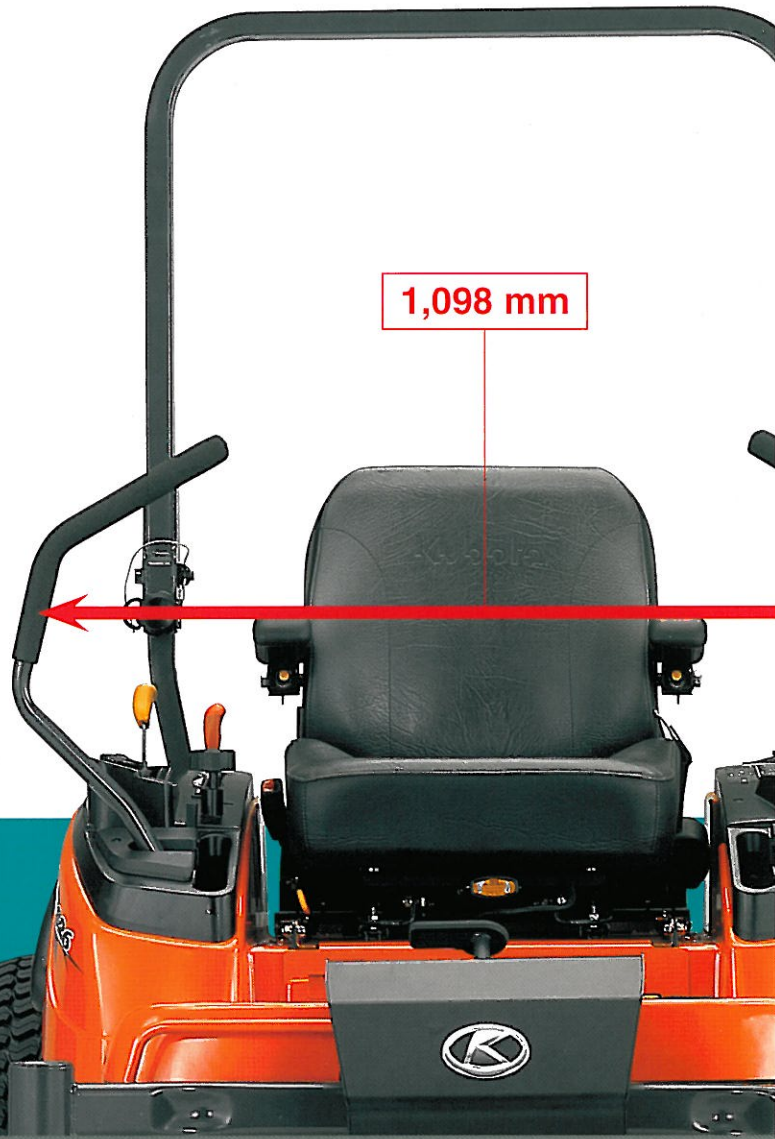

PARKING BRAKE
(Hands-free)

HANDS-FREE
HYDRAULIC
DECK LIFT


MOWER DECK

PRO COMMERCIAL MOWER DECK

To ensure superior cutting performance, even at faster speeds, our newly developed, deeper mower deck utilizes a flat design and our unique new baffling system, which forces grass through all three cutting blades. And, to meet the needs of varying job sizes, the ZD326 mower deck is available in side and rear discharge versions.



NEW
5.5-inch Deep
Mower Deck

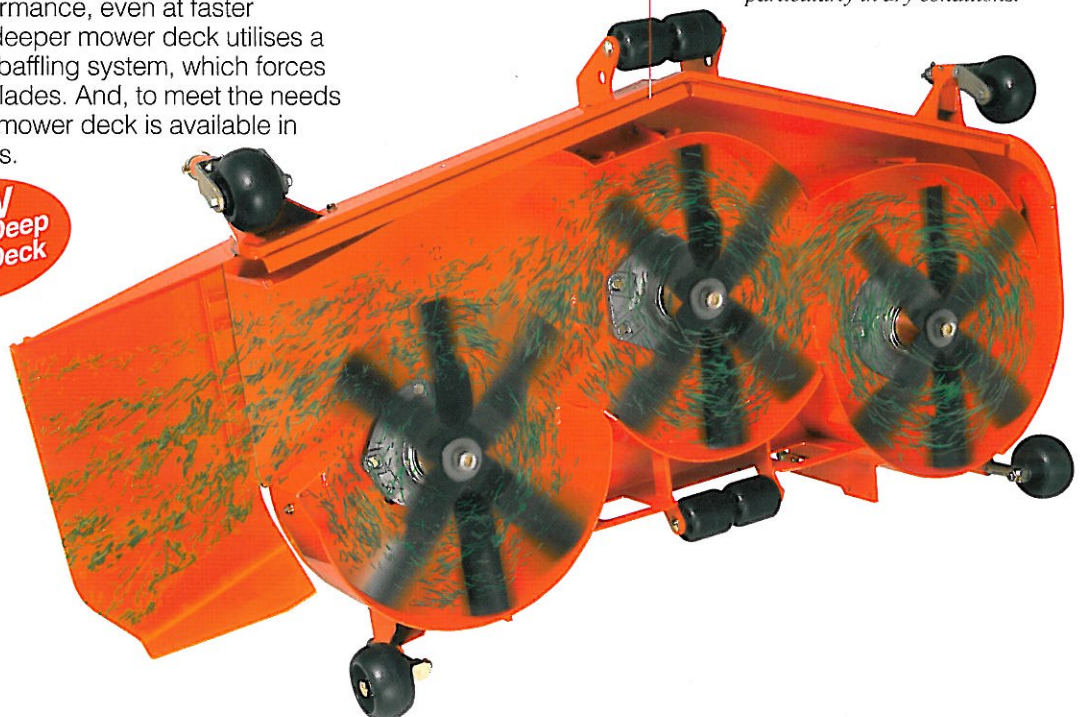

ANTI-OVERFLOW SYSTEM

Kubota has enhanced the edges of the mower deck to reduce grass spillage and help keep lawns tidy, particularly in dry conditions.

MAINTENANCE

Kubota has made maintenance of the ZD326 unbelievably simple. Thanks to a unique maintenance lift system, a tilt-up seat for quick and thorough access to the HST, and new maintenance hatch on the full-flat platform, work can be completed on every key component without difficulty.

MAINTENANCE LIFT

For routine maintenance underneath the mower, Kubota's unique two-pin, tilt-up, lift feature allows the front of the ZD326 to be easily raised without having to remove the mid-mount mower. The system includes locks for the front tyres to ensure safety. It's like having a built-in jack right there when you need it.



RADIATOR SCREEN




AIR CLEANER INDICATOR




ENGINE COOLANT ALERT




TIE DOWN

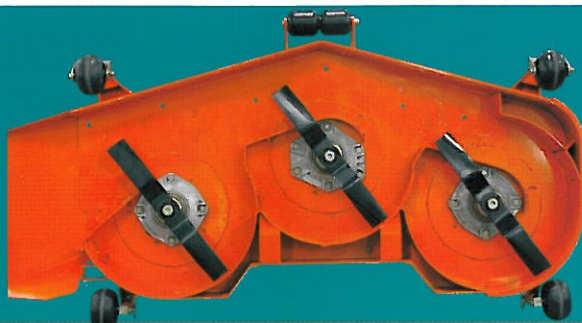

SIDE DISCHARGE MOWER
(AVAILABLE BY SPECIAL ORDER)

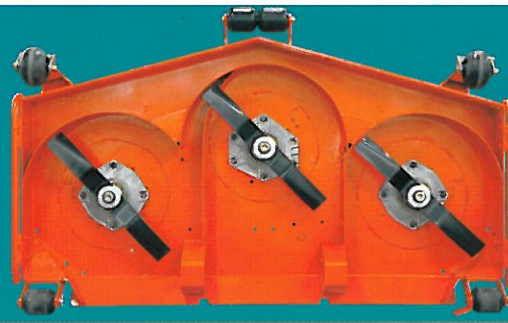


REAR DISCHARGE MOWER

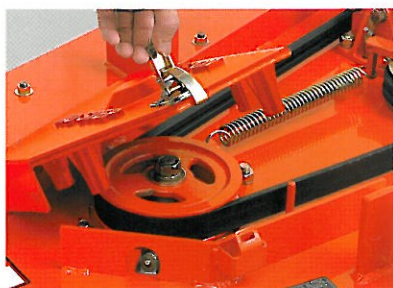

SPINDLE BEARINGS AND PULLEYS

Kubota has improved the durability of the mower pulley holder bearings to provide maximum strength and support.

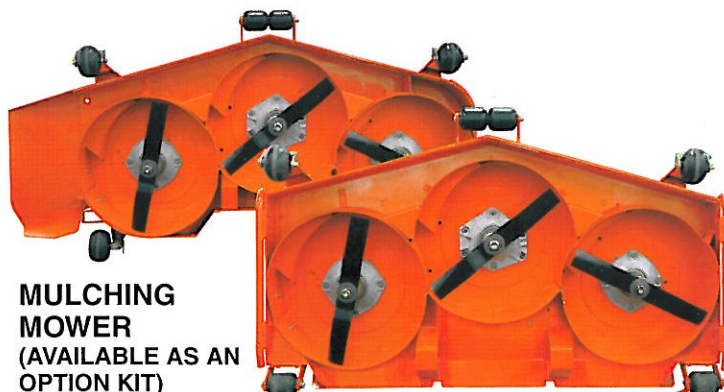


MULCHING MOWER
(AVAILABLE AS AN OPTION KIT)



1/4" INCREMENT CUTTING HEIGHT ADJUSTMENT

Cutting height can be easily changed, from 1" to 5" in 1/4" increments, with the 1/4" adjustment dial. Located conveniently on the control panel, the adjustment dial is easily accessed to increase or decrease cutting height.

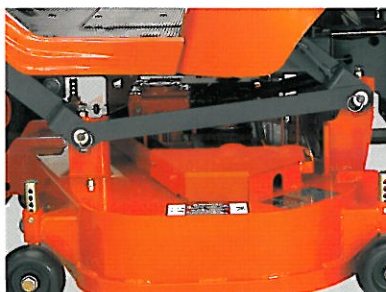


MOWER LIFT LINK

The ZD326 features stronger lift link components, including an enhanced lift shaft, a thicker lift arm, and a wider shaft diameter.


KUBOTA DIESEL ENGINE

Kubota diesel engines are known for their durability, high performance, energy efficiency and reliability. Kubota diesels offer many advantages over gasoline engines: as much as 30%* more fuel efficiency, higher torque, fewer emissions and quieter operation, among others. Kubota engines can aggressively take on heavy mowing jobs for extended periods. And, our 26-horsepower engine promises to exceed the high expectations of the commercial landscaper.

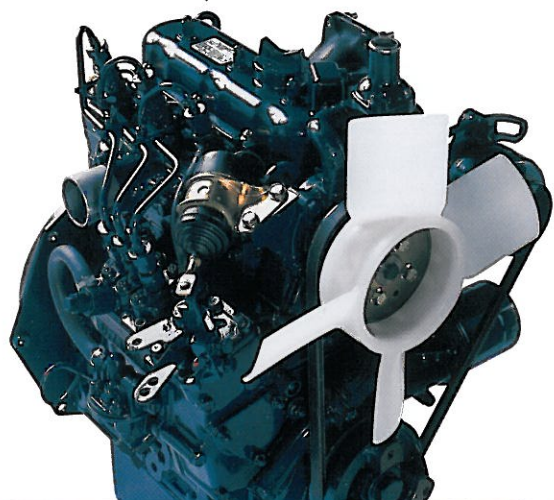

DUAL-ELEMENT AIR CLEANER

Kubota ZD326 mower comes equipped with a dual-element air cleaner which features a vacuum sensor to tell you when to service the air cleaner.

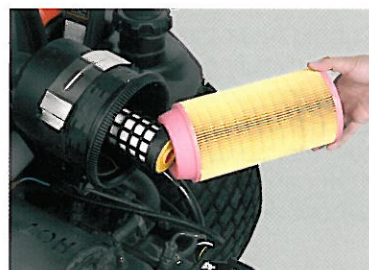

LARGE FUEL TANK

Kubota has increased the fuel capacity for the ZD326 to 45 L by including two fuel tanks. This allows the operator to work longer and more efficiently without stopping to refuel. This feature is especially handy for those big jobs.




LARGE RADIATOR

The radiator on the ZD326 mower is built to improve cooling performance and prevent the engine from overheating.

KUBOTA DIESEL ZERO-TURN MOWER


ZD326

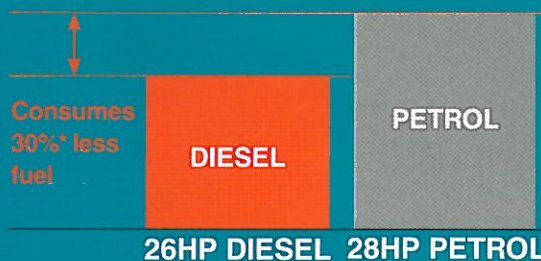

*Results vary by the engine settings, grass conditions, terrain, etc.

DURABILITY

The ZD326 is extremely reliable, thanks in no small part to the new Kubota integral-type HST transmission system. It's designed with strong components and the high capacity an HST system needs to assure outstanding commercial mowing performance and productivity.

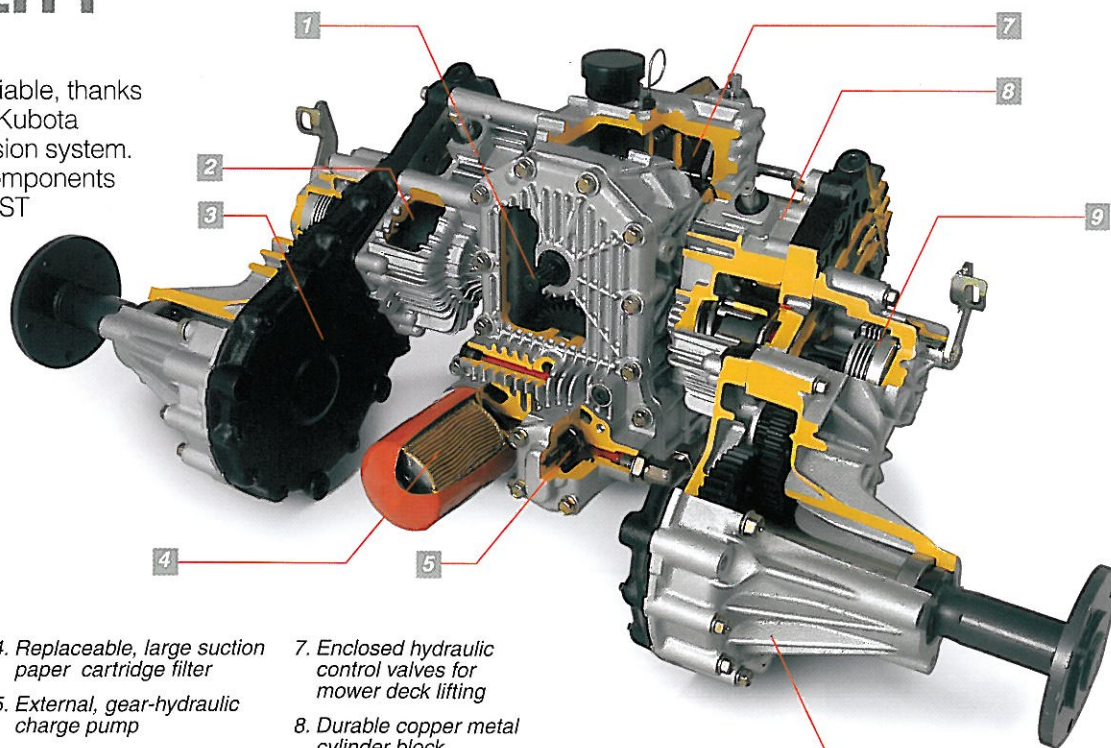

1. Wet-type hydraulic PTO clutch; 30% increase in transfer capacity
2. 120% increase in HST capacity
3. Strong casting rear shaft cover

4. Replaceable, large suction paper cartridge filter
5. External, gear-hydraulic charge pump
6. Extended rear tyre axle for added strength

7. Enclosed hydraulic control valves for mower deck lifting
8. Durable copper metal cylinder block
9. Wet-type multi-disk brake (on parking brake)

Specifications

Model		ZD326	
		ZD326-60-EU/ZD326-60R-EU	
Engine	Model	Kubota D1005	
	Type	Diesel, liquid-cooled (3 cyl.)	
	Max. horsepower (Gross)	26HP@3200rpm	
	Total displacement	1001cc	
	Starting system	Key switch - super glow	
Dimensions	Overall length	2220 mm	
	Overall width	(w/ mower)	1854 mm (side) / 1604 mm (rear)
		(w/o mower)	1460 mm
	Overall height	(w/ ROPS upright)	1915 mm
		(w/ ROPS folded)	1555 mm
Wheel base		1410 mm	
Tread	Front	975 mm	
	Rear	1150 mm	
Tyre size	Front	15 × 6.0-6 pneumatic	
	Rear	26 × 12.0-12	
Weight (w/ mower) (without fuel)		771 kg	
Transmission system		2-HST w/ Gear	
Speed control		2-hand lever	
Travel speed range	Forward	0-15.0 km/h	
	Reverse	0-8.3 km/h	
Brake type		Wet multi disks, foot operated	
PTO	Type	Shaft drive	
	Clutch type	Wet multi disk	
	PTO brake	Wet single disk	
Mower deck	Model	RCK60P-326Z-EU/RCK60R-326Z-EU	
	Mower lift system	Hydraulic	
	Mower deck type	Fabricated deck	
	Deck depth	140 mm	
	Deck steel thickness	4.2 mm, 4.6 mm	
	Anti-scalp roller	Swivel	
	Cutting width of mower	60 in.	
	Number of blades	3 blades	
	Cutting height	1 in. ~ 5 in. / 1/4 in. increments	
	Mounting system of mower	Parallel linkage	
	Blade tip speed (max.)	15100 ft/min	
Seat adjustment		One touch system (weight, armrests, reclining, and lumbar support)	
Step deck		Full flat	
Engine stop system		Key stop	
Fuel tank capacity		45 ltrs.	
Battery		12 Volts, 51R, 450CAA@0°F, 70 min. RC.	
Alternator capacity		14 Volts 14 Amps	
Water temperature indicator		Standard	
Hour meter		Standard	
Fuel gauge		Electric	

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional, and not standard equipment.

Please contact your local Kubota dealer for warranty, safety or product information.

©2009 Kubota Corporation



KUBOTA (U.K.) LIMITED

Dormer Road Thame, Oxfordshire, OX9 3UN
 Phone Thame (01844) 214500 Fax (01844) 216685
 E-mail: sales@kubota.co.uk

Web site: <http://www.kubota.co.uk>